

Data Line Protection

MODELS

DLP-10G • 20G • 30G

Protects 4-20mA loops, I/O Ports, Sensors



The **DLP-10G/20G/30G** Series are triple-stage hybrid protectors that combine brute force primary protection with high speed silicon avalanche diode stages for rigorous transient clamping.


This series guards mainframes, process controllers and other complex instrumentation from damage due to lightning and switching surges. Use DLP-10G for two wire protection, DLP-20G for four wire protection, and DLP-30G for eight wire protection.

The DLP-10G/20G/30G are hardwired and ready to be installed anywhere.

MODEL

DLP-5.10

Protects 10BASE-T, CCTV, Token Ring, I/O Ports

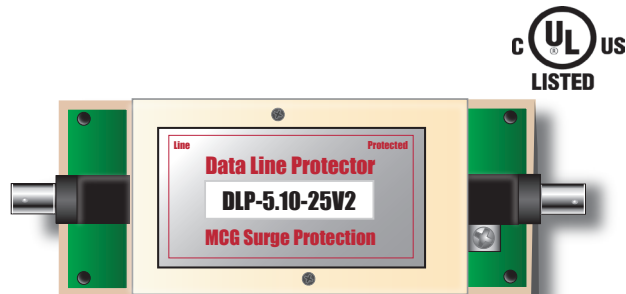

The **DLP-5.10** is a heavy-duty wideband protector that prevents cable transients from damaging sensitive loads. When sensing a transient on either shield or the center conductor, the DLP-5.10 operates in nanoseconds to automatically shunt damaging transients to ground.

The DLP-5.10 offers ideal protection for 10BASE-T, hubs, CCTV, routers, token ring and I/O ports.

Installation is quick and easy using BNC connectors. The DLP-5.10, like all MCG protectors, is backed with a twenty year, no-nonsense warranty. Please call our Technical Support Staff with all your application questions.

SPECS

Extra Heavy Duty:	Ipk=10kA, 8/20 μ s	Note:
Clamp V:	6, 15, 25, 60, 100, 200V	6V for RS-422,423,485
Response:	<1ns	25V for RS-232
Attenuation:	<1dB at 10MHz	60V for CSU/DSU's
Series Rs:	5 Ohms	200V for Dial-up Lines
Connection:	6-32 Screw Terminals	
Mounting:	DLP-10G/4.2" x 1.50"/.185 ID, 107 x 38mm/4.7 ID	
	DLP-20G/4.2" x 2.25"/.185 ID, 107 x 57mm/4.7 ID	
	DLP-30G/4.2" x 3.75"/.185 ID, 107 x 95mm/4.7 ID	
UL:	497A (Fuse)	
Weight:	<1 lb. (.45kg)	
Warranty:	20 Years	

SPECS

Extra Heavy Duty:	Ipk=10kA, 8/20 μ s
Connector:	BNC (F/F)
Clamp V:	6V, 25V
Protected Lines:	Center and Shield
Series Rs:	2.4 Ohms
Attenuation:	<1dB at 70MHz
Mounting:	4.2" x 1.5" / .185" ID
	107 x 38mm/4.7mm ID
UL:	497B
Weight:	<1 lb. (.45kg)
Warranty:	20 Years

DIN-Rail mounting available upon request.
Call MCG for additional non-standard voltages.

922 Middletown Rd, New Stanton, PA 15672, USA • Telephone: (724) 925-8181 • Fax: (724) 925-1764

SENTINEL POWER INC. • Toll Free: 1-800-784-7989 - www.sentinelpowerinc.com - ken@sentinelpower.com