

Current Transformers, 5A Output

AL, BL, CL, & H681x-A Series



SPECIFICATIONS (Solid-Core)



Agency Approvals	UL61010-1
INPUTS	
Frequency Range	50-400 Hz
Leads	2 ft (0.6 m)
ACCURACY	
Accuracy	Varies at 60 Hz (see Ordering Information)
OUTPUTS	
Output at Rated Current	5A
MECHANICAL	
Insulation	600VAC
ENVIRONMENTAL	
Operating Temp Range	-30° to 55°C (-22° to 131°F)
Storage Temp Range	-30° to 105°C (-22° to 221°F)

SPECIFICATIONS (Split-Core)



Agency Approvals	UL61010, EN61010-1
INPUTS	
Frequency Range	50/60 Hz
Leads	6 ft (1.8 m)
ACCURACY	
Accuracy	±1% of reading from 10% to 100% of rated current
OUTPUTS	
Output at Rated Current	5A
MECHANICAL	
Insulation	600VAC
ENVIRONMENTAL	
Installation Category III	Pollution Degree 2
Operating Temp Range	2400A models only: -15° to 50°C (5° to 122°F); All other models: -15° to 60°C (5° to 140°F)
Storage Temp Range	-40° to 70°C (-40° to 158°F)
Humidity Range	0-95% noncondensing

Split-Core and Solid-Core Designs for Flexibility

FEATURES

- Unique hinge design on split-cores...easy installation
- 5 Amp standard output...compatible with existing systems
- UL recognized


DESCRIPTION

Veris' split-core and solid-core current transformers provide a 0-5AAC output for use with transducers, data loggers, and chart recorders.

APPLICATIONS


- Data logging
- Recording
- Power monitoring
- Energy management
- Alternative energy monitoring
- Cost allocation

WIRING EXAMPLE

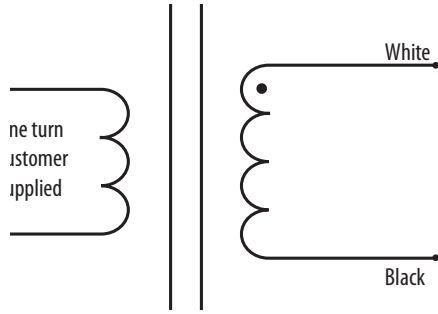

DIMENSIONAL DRAWINGS

AL/BL/CL Solid-core

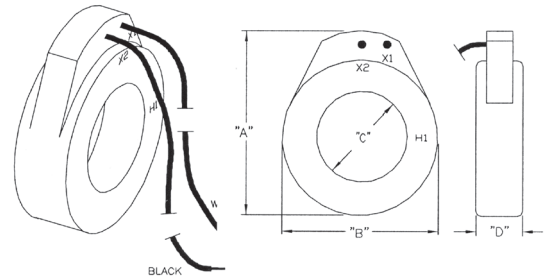

AL/SMALL

- A = 2.7" (70 mm)
- B = 2.5" (63 mm)
- C = 1.1" (26 mm)
- D = 1.1" (26 mm)

BL/MEDIUM

- A = 3.7" (90 mm)
- B = 3.4" (88 mm)
- C = 2" (52 mm)
- D = 1.1" (26 mm)

CL/LARGE

- A = 4.9" (124 mm)
- B = 4.5" (115 mm)
- C = 3" (76 mm)
- D = 1.1" (26 mm)


ORDERING INFORMATION

Solid-Core



MODEL	RATIO	ACCURACY AT 60 Hz	BURDEN CAPACITY IN VA	
AL500	50:5	3%	2.0	
AL101	100:5		2.0	
AL151	150:5		4.0	
AL201	200:5		4.0	
AL251	250:5		6.0	
AL301	300:5		8.0	
AL401	400:5		10.0	
BL501	500:5		1%	12.5
BL601	600:5			15.0
BL801	800:5			8.0
BL102	1000:5	10.0		
BL122	1200:5	12.5		
CL122	1200:5	10.0		
CL152	1500:5	12.5		
CL162	1600:5	12.5		
CL202	2000:5	15.0		

H681x-5A Split-core

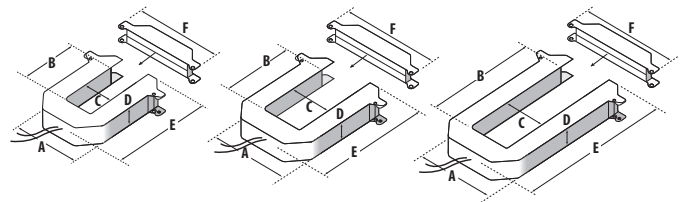

H6810/SMALL

- 200 Amp
- 300 Amp

- A = 3.8" (96 mm)
- B = 1.2" (30 mm)
- C = 1.3" (32 mm)
- D = 1.2" (30 mm)
- E = 4.0" (100 mm)
- F = 4.8" (121 mm)

H6811/MEDIUM

- 400 Amp
- 600 Amp
- 800 Amp

- A = 4.9" (125 mm)
- B = 2.9" (73 mm)
- C = 2.5" (62 mm)
- D = 1.2" (30 mm)
- E = 5.2" (132 mm)
- F = 6.0" (151 mm)

H6812/LARGE

- 800 Amp/1000 Amp/1200 Amp/1600 Amp/2000 Amp/2400 Amp

- A = 4.9" (125 mm)
- B = 5.5" (139 mm)
- C = 2.5" (62 mm)
- D = 1.2" (30 mm)
- E = 7.9" (201 mm)
- F = 6.0" (151 mm)

Split-Core



MODEL	RATIO	ACCURACY FROM 10% TO 100% OF MAX LOAD	BURDEN CAPACITY IN VA
H6810-200A-5A	200:5	1%	2.5
H6810-300A-5A	300:5		2.5
H6811-400A-5A	400:5		5.0
H6811-600A-5A	600:5		5.0
H6811-800A-5A	800:5		12.5
H6812-800A-5A	800:5		5.0
H6812-1000A-5A	1000:5		22.5
H6812-1200A-5A	1200:5		22.5
H6812-1600A-5A	1600:5		22.5
H6812-2000A-5A	2000:5		22.5
H6812-2400A-5A	2400:5	22.5	

ACCESSORIES

Universal Mounting Bracket Kit for H681x CTs (AH06)
Shorting Blocks (U002 Series)



U002 Series